


# YAC-N823

## N-octyltriethoxysilane

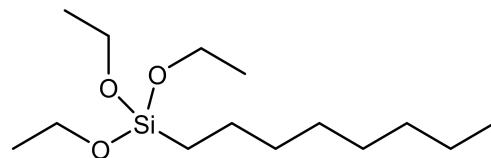

**CAS No. 2943-75-1**

### Specifications:

Tests	Specification
Appearance	Colorless transparent liquid
Assay	≥98.0%
Refractive index n <sup>25</sup> D	1.4050-1.4250
Hazen(Pt-Co)	≤50
Chlorine	≤50ppm
Density (20°C)	0.8650-0.8850 g/cm <sup>3</sup>

**Package:** 180Kg Drum .

### Application:

- polyolefin, styrene, for the surface treatment of mineral fillers in plastics. Premium-grade penetrating sealers are easily formulated by blending 10%~40% YAC-N823 in alcohols or organic solvents.
- Reinforced concrete structures are protected from water and water-based salts, and normal wear resistance, surface appearance and most other desirable properties remain unchanged.

**Storage:** Keep closed and store in a cool place and inert gas. Moisture sensitivity.



**Recommend Shelf Life:** 12 months.