


YAC-V151

Vinyltriethoxysilane

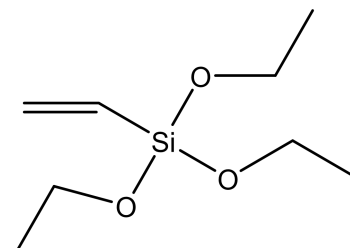

CAS No. 78-08-0

Specifications:

Tests	Specification
Appearance	Colorless transparent liquid
Assay	≥98%
Hazen (Pt-Co)	≤30
Refractive index n_D^{25}	1.3900-1.4015

Package: 180Kg Drum or 900Kg IBC containers.

Application:

- It offers vinyl and silane functionality, making it excellent candidates for crosslinking organic polymers. It may also be useful for chain extension of RTV silicones or other silane or OH functional polymers. The resulting Si-O-Si crosslink sites are highly resistant to exposure to moisture, chemicals and UV. Siloxane crosslinks tend to not generate color and are resistant to acid rain. It can be added as monomers during emulsion polymerization to form silane modified latexes. The silane in such latexes function as crosslinkers, forming very stable Si-O-Si linkages.
- YAC-V151 can also be grafted to select unsaturated polymers such as polyethylene, polyester, and styrene-butadiene co-polymers, via free radical chemicals. Once grafted to the resin, the resin exhibits silane functionality through which the resin can be crosslinked via an ambient moisture cure mechanism.

Storage: Stored in cool and dry place, avoid moisture and sunshine.

Recommend Shelf Life: 12 months.