


YAC-V171

Vinyltrimethoxysilane

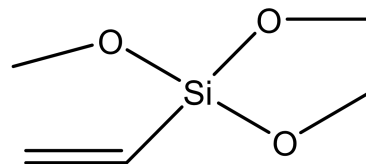

CAS No. 2768-02-7

Specifications:

Tests	Specification
Appearance	Colorless transparent liquid
Assay	$\geq 99.0\%$
Hazen (Pt-Co)	≤ 30
Chlorine	$\leq 30\text{ppm}$
Refractive index n_D^{25}	1.3875-1.3980

Package: 190Kg/ Drum,950Kg IBC.

Application:

- It is suitable for wet curing polymer materials such as polyethylene. The characteristic of this process is that vinyl silane is grafted with polymer materials through peroxides during extrusion.
- It can react with inorganic fillers and organic polymers, so it can be used as an effective bonding accelerator, but also as a dehumidifier and so on.

Storage: Keep away from open flames, hot surfaces and sources of ignition. Keep container tightly closed



Recommend Shelf Life: 12 months.