YAC-IC323

3-Isocyanatopropyltriethoxysilane

CAS No. 24801-88-5

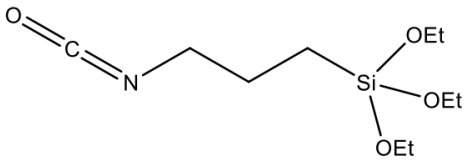

Specifications:

Tests	Specification
Appearance	Colorless transparent liquid
Assay	≥98.0%
Color	≤30
Density (25℃)	0.9500~1.0500g/cm^3
Refractive index (nD^{25})	1.3650~1.4250

Package: 200Kg/Drum or 1000Kg/IBC

Application:

- It can be used as silane crosslinking agent for one part moisture curable urethane adhesives, sealants and coatings.
- It can also be used as a modifier to hydroxyl resins: acrylic resin, PVA.
- It can provide good wet adhesion to glass, metal and other inorganic substrates, and can provide good thermal, chemical and UV stable performance.

Storage: Keep container tightly closed in a dry and well-ventilated place. Keep away from heat and sources of ignition.



Recommend Shelf Life: 12 months.